Series 86-MVY-18



#### **Technical details**

Connection Temperature range	G1/8 0°C +50°C					
Medium	Filtered, oil-free and dried compressed air according to ISO 8573-1:2010, Class 7:2:4, instrument air, free of aggressive additives. Alternatively the pressure dew point must be at least 10°C below lowest occurring ambient temperature.					
Materials	Body: Al (anodized), plastic, seals: NBR, inner parts: Al, steel and plastic					
Protection	IP 50 according to EN 60529					


Electrically operated spool valve. The manual override is detent/ non-detent and is operated by screwdriver.



86-MVY-18-530-xxx 5/3-way, center position closed

86-MVY-18-533-xxx 5/3-way, center position exhausted

#### 5/2-way valves



86-MVY-18-510-xxx 5/2-way, single solenoid, air spring return 86-MVY-18-520-xxx 5/2-way, double solenoid

Please complete: xxx = electrical option

#### **Electrical options**

Nominal voltage	Power consumption	Specifics	Plug connection*1	-xxx Manual override on same side of ports 2 and 4
24 V DC	1.3 W	with integrated LED	Form L	-442
			*1 Plug socket not inclu	ıded

5/3-way valves

12

#### **Technical data**


Model-no.:	86-MVY-18-510	86-MVY-18-520	86-MVY-18-530	86-MVY-18-533	
Operating pressure (bar)	1.57	17	1.57	1.57	
Nominal size (mm)	3.2	3.2	3	3	
Flow rate (NI/min)	490	490	420	420	
Response time (ms) at 6 bar	20	20	20	20	
Weight (kg)	0.062	0.076	0.082	0.082	

# Series 86-MVY-18


# **airec**

#### Dimensions


#### 86-MVY-18-510



#### 86-MVY-18-520




#### 86-MVY-18-53x

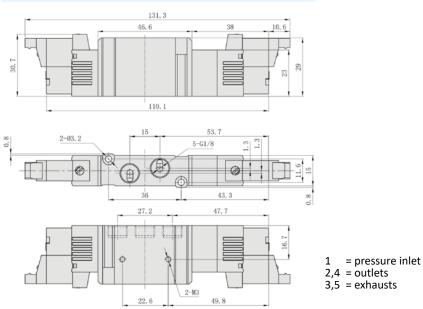

#### Accessories

### Plug sockets with cable



5





## Series 86-PRS

#### **General information**

The 86-PRS manifolds are suitable for the 86-MV-5 valve series. Blind plates 86-PRS-xxx-V are available for blank stations. All mounting screws and o-rings are included.






#### Order code

<u>86-PRS-***-**</u>									
Series		◀──┘	└─►	Number o	of stations				
				0220					
Size		◀		Size	Standard				
MVY	for series 86-MVY-18			MVY	04, 06, 08, 10, 12				
100	for series 86-MV-5-18			100	02, 04, 06, 08, 10, 12, 14, 16				
200	for series 86-MV-5-28, 86-MV-5-14			200	02, 04, 05, 06, 08, 10, 12, 14, 16				
300	for series 86-MV-5-24, 86-MV-5-38			300	02, 04, 06				
400	for series 86-MV-5-12			400	02, 04				

#### Dimensions

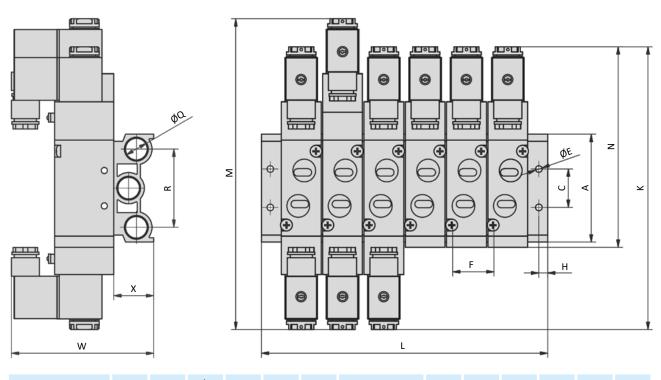

Model-no.:	А	С	ØЕ	F	н	К	L	М	N	Q	R	W	Х
86-PRS-MVY-xx	60	20	4.2	16	5	119	(xx-1)*16 + 34	132	92	G1/4	41	57	26.5
86-PRS-100-xx	58	20	4.2	19	5	140	(xx-1)*19 + 38	155	98	G1/4	40	77	22
86-PRS-200-xx	59	21	4.3	23	6	170	(xx-1)*23 + 46	189	116	G1/4	43	90	22
86-PRS-300-xx	75	26	4.5	28	6	189	(xx-1)*28 + 54	208	134	G3/8	53	98	27
86-PRS-400-xx	98	32	5.5	35	7	222	(xx-1)*35 + 63	243	168	G1/2	68	112	36
	xx - number of stations												

xx = number of stations